

J-Type Bulkhead


BULKHEAD

Trelleborg AVS defense portfolio includes both "deck" and "bulkhead" versions of J type shock mounts. Like other shock mounts, all J-type shock mounts are registered under NATO Stock Numbers (NSN). Trelleborg AVS-NL CAGE code is H0040. The asymmetric version of the J-mount is often referred to as the "bulkhead" version because of its shape that requires less installation space. These J-mounts are highly efficient shock isolators as their lifetime is limited by the event of the shock itself and their replacement inexpensive. After being exposed to shock the J-mount needs to be replaced to re-ensure protection of the equipment. The J-mount is often used for non-vital equipment without a vibration source, such as switch cabinets and electronic equipment.



TECHNICAL DRAWING

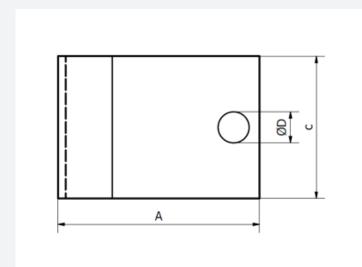

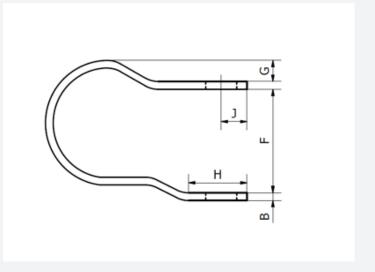

CLASS	NATO STOCK NUMBER (NSN)	DIMENSIONS (MM)							
		А	В	С	ØD	F	G	Н	J
1	5340-99-533-2576	69	2	55	M10	38	6	25	13
2	5340-99-533-2577	69	3	55	M10	38	6	25	13
3	5340-99-533-2578	76	4	55	M12	40	8	25	13
4	5340-99-533-2579	105	6	70	M16	49	15	32	16
5	5340-99-533-2580	125	8	90	M20	67	9	44	22
6	5340-99-533-2581	159	12	85	M24	83	11	57	25

CLASS	STATIC LOAD RANGE (KG)	PERMISSIV	E DEFORMATI	ON (MM)	MAX TRANSMITTED ACCELERATION AT STATIC LOAD (M/S2)		
		Х	Y	Z	MIN. MASS	MAX. MASS	
1	2 - 5	22	55	55	360	180	
2	5 - 10	22	55	55	340	180	
3	10 - 20	22	55	55	280	130	
4	20 - 35	24	55	55	280	160	
5	35 - 70	36	55	55	240	120	
6	70 - 135	47	55	55	260	140	